
	REVISIINS								
	REV.	DESCRIPTION	DATE	APPROVAL					
	Α	RELEASE NEW DRAWING	9/8/95						

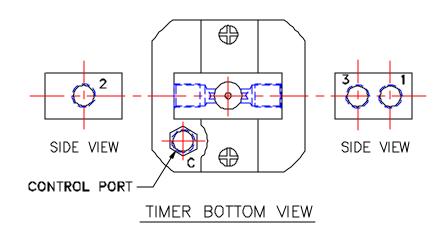

ON DELAY:

- TIME DELAY WHEN CONTINUOUS PRESSURE IS APPLIED TO THE CONTROL PORT — C.
- INTERRUPTING CONTINUOUS PRESSURE TO CONTROL PORT
 C (DURING OR AFTER TIMING) WILL RESET FOR NEW TIME DELAY CYCLE,
- ALL PORTS SUPPLIED WITH 1/8 NPTF THREADS.
- MOUNT HORIZONTALLY IN PANEL (UNLESS OTHERWISE SPECIFIED DEVICE IS CALIBRATED FOR HORIZONTAL OPERATION).

NEXT ASSY

USED ON

APPLICATION

VALVE CONNECTION OPTIONS:

- 3 AS INPUT TURNS OFF OUTPUT WHEN TIMED OUT.

 PASSES AIR FROM PORT 3 TO 2 WHILE TIMING.

 DUMPS (VENTS) AIR FROM 2 TO 1 WHEN TIMED OUT.
- 2 AS INPUT DIVERTER

 DURING TIMING AIR FLOWS FROM PORT 2 TO 3.

 AFTER TIMING OUTPUT IS SWITCHED FROM PORT
 3 TO PORT 1.
- 1 AS INPUT TURNS ON OUTPUT AFTER TIME DELAY.

 DUMPS (VENTS) AIR FROM PORT 2 TO PORT 3

 WHILE TIMING.

 AIR FLOWS FROM PORT 1 TO PORT 2 AFTER

 TIME DELAY.

	_	_								
	OTY REQ'D	ITEN ND	PART DR IDENTIFICATION NO.		NOME! OR DE	ICLATURE SCRIPTION			MATERIAL SPECIFICATION	
			•							
LINLEZZ CITHERWIZE ZPECIFIED DIMENSIONS ARE IN ONCHES. TOLERANGES ARE:		- ELL :	UHNKE C			CO	CONTROLS			
±	NOCK ± LDOE			9/8/95	PNEUMATIC TIMER					
MATER			CHECKED		ON DELAY PANELMOUNT					
FINISH			ISSUED		SIZE B	FSCM NE	1	DWG, ND,	PT35)
DO NOT SCALE BRAWING		lG			SCALE 41			SHEET	2 OF 2	