


CAUTION: DO NOT OVER TIGHTEN DURING ASSEMBLY OF MATING FITTING.

TECHNICAL DATA:

OPERATING PRESSURE RANGE - 7.5 TO 30 PSI
 MAXIMUM COUNT SPEED - 10 CPS (CYCLES PER SECOND)
 OPERATING TEMPERATURE RANGE - 32°F TO 140°F
 WEIGHT - 2.5 OUNCES
 COLOR - CASE (BLACK), LETTERS (WHITE)
 DIGIT SIZE - .16 INCH (4mm)
 DUTY CYCLE - CONTINUOUS (MIN. PULSE DURATION 8ms)
 (MIN PAUSE DURATION 10ms)
 MEDIA - FILTERED AIR OR NONAGGRESSIVE GAS NON-LUBRICATED

NOTE: 1 - PRESSURE MUST DROP TO 0 PSI BETWEEN PULSES.
 2 - DO NOT LUBRICATE (DEVICE IS SELF LUBRICATING)

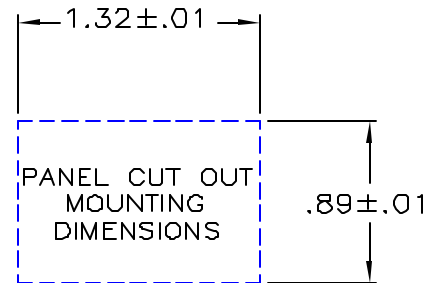

HOW TO ORDER: AVAILABLE IN THE FOLLOWING MODELS

LPM1420 = NON-RESET MODEL
 LPM1421 = MANUAL PUSH BUTTON RESET
 LPM1421V = P.B. RESET WITH RESET GUARD

ELLIS/KUHNKE CONTROLS			
DRAWN BY	EJL	8/15/02	4 - DIGIT LPM COUNTER LOCKING SPRING VERSION
CHECKED			
ISSUED			
	SIZE	FSCM NO.	DWG. NO.
	B		LPM142*
	SCALE	.70	SHEET