



MANUAL PUSH BUTTON  
(MODELS PM1611 & PM1611V ONLY)

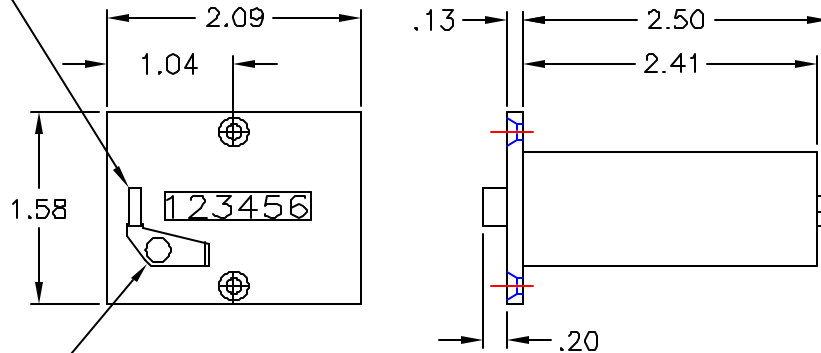

RESET GUARD  
(MODEL PM1611V ONLY)

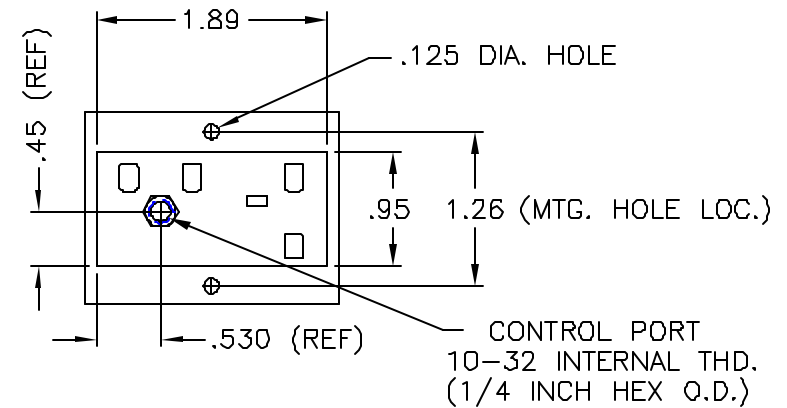


CAUTION: DO NOT OVER TIGHTEN  
DURING ASSEMBLY OF  
MATING FITTING.

TECHNICAL DATA:

OPERATING PRESSURE RANGE - 25 TO 100 PSI  
 MAXIMUM COUNT SPEED - 10 CPS (CYCLES PER SECOND)  
 OPERATING TEMPERATURE RANGE - 32°F TO 140°F  
 WEIGHT - 3.3 OUNCES  
 COLOR - CASE (BLACK), LETTERS (WHITE)  
 DIGIT SIZE - .16 INCH (4mm)  
 DUTY CYCLE - CONTINUOUS (MIN. PULSE DURATION 8ms)  
 (MIN PAUSE DURATION 10ms)  
 MEDIA - FILTERED AIR OR NONAGGRESSIVE GAS NON-LUBRICATED

NOTE: 1 - PRESSURE MUST DROP TO 4.4 PSI MAX. BETWEEN PULSES  
 2 - DO NOT LUBRICATE (DEVICE IS SELF LUBRICATING)

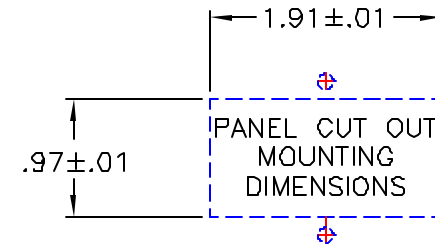

HOW TO ORDER: AVAILABLE IN THE FOLLOWING MODELS

PM1610 = NON-REST MODEL  
 PM1611 = MANUAL PUSH BUTTON RESET  
 PM1611V = P.B. RESET WITH RESET GUARD

ELLIS/KUHNKE CONTROLS

DRAWN BY	EJL	6/15/02	6 - DIGIT PM COUNTER PANEL MOUNT VERSION		
CHECKED			SIZE	FSC#	DWG. NO.
ISSUED			B		PM161*
			SCALE	4:1	SHEET