


CAUTION: DO NOT OVERTIGHTEN DURING ASSEMBLY OF MATING FITTING.

TECHNICAL DATA:

OPERATING PRESSURE RANGE - 25 TO 100 PSI
 MAXIMUM COUNT SPEED - 10 CPS (CYCLES PER SECOND)
 OPERATING TEMPERATURE RANGE - 32°F TO 140°F
 WEIGHT - 3 OUNCES
 COLOR - CASE (BLACK), LETTERS (WHITE)
 DIGIT SIZE - .16 INCH (4mm)
 DUTY CYCLE - CONTINUOUS (MIN. PULSE DURATION 8ms)
 (MIN. PAUSE DURATION 10MS)
 MEDIA - FILTERED AIR OR NONAGGRESSIVE GAS NON-LUBRICATED

NOTE: 1 - PRESSURE MUST DROP TO 4.4 PSI MAX BETWEEN PULSES
 2 - DO NOT LUBRICATE (DEVICE IS SELF LUBRICATING)

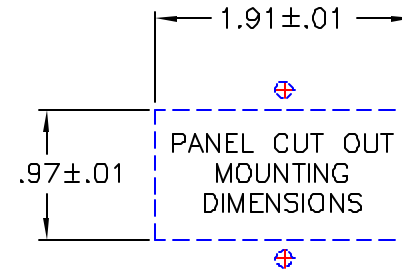

HOW TO ORDER: AVAILABLE IN FOLLOWING MODEL
 PM1810 = NON RESET MODEL ONLY

ELLIS/KUHNKE CONTROLS			
DRAWN BY	EJL	8/19/02	8 - DIGIT PM COUNTER PANEL MOUNT VERSION
CHECKED			
ISSUED			SIZE B
			FSCM NO.
			DWG. NO. PM1810
			SHEET